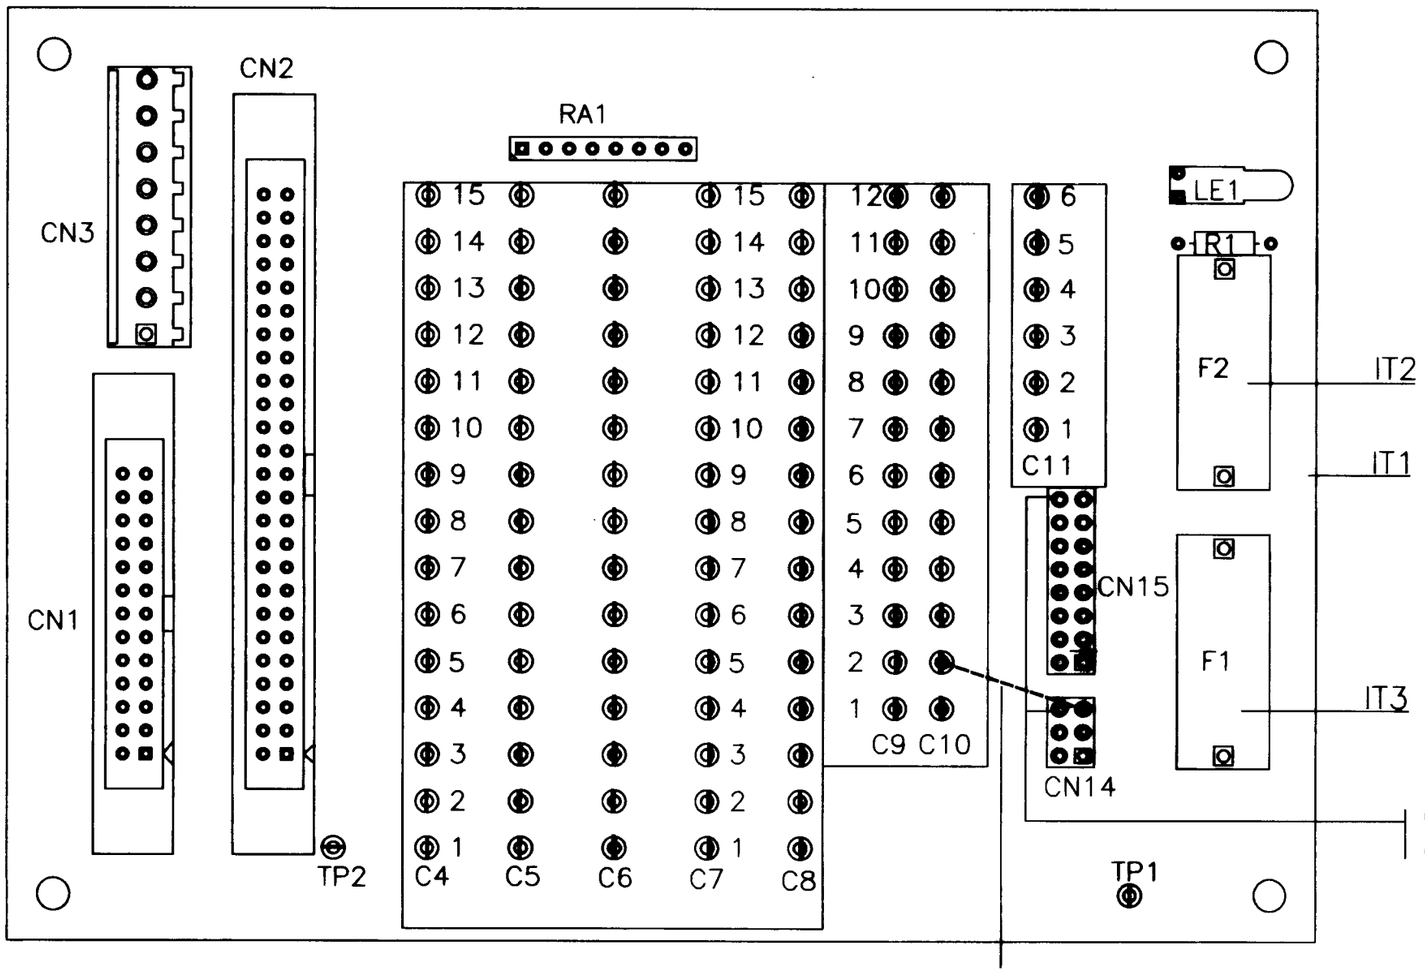

Verbinding aanbrengen aan onderzijde
tussen C10 2 en CN14 pin 5
Draad : 7506000

Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. All rights in or to any and all know-how contained are herein explicitly reserved by the copyright owner

material (W.st.nr.) / material	warmte-/oppervlaktebehandeling / treatment/finishing	alle maten in mm / all dim. in mm	
norm standard / afgeleide waarde / default	lin. tol. / lin. tol. ISO 129: 0,5	schroefdr. / scr.thread ISO 965: 6H/6g	diam. tol. / diam. tol. ISO 286: H13/h13
ruwheid / roughness ISO 1302: 3,2 Ra in um	kanten / edges DIN 6784: 0,3 / -0,3	vorm-/plaatstol. / geom. tolerances ISO 1101	ISO 128
schaal / scale: 1.5: 1			
opp./order/proj. / project/order no.: 540	vervg/extern nr. / previous/ext. no.	naam / title: Connect Board	
getekend / drawn: v.Putten			1996-09-30
contr. / checked: Parlevliet			1993-12-15
goedk. / approved: RB		tek.nr. / drwg.no: 115-0540605 -30	blad / sheet 1 van / of 1

BRUKER NONIUS

ClibPDF - www.fastio.com